#### MOONS' moving in better ways

# **S Series Intelligent Driver**



### 0.1% Deep Dimming Human Centric Lighting

Flicker Free

Meet : CEC title 24 JA8 & JA10 IEEE PAR 1789-2015

#### 20W S Series-1 Channel DMX/RDM Driver-PU020S105AQI890

MOONS' 20W S Series 1 Channel LED Drivers are designed for DMX/RDM dimming application, the DMX dimming mode can be set to Solo mode. It is a wireless programmable LED driver with MOONS' Touch setting tool.

#### Main Characteristics

- 1 Channel, constant current driver
- Programmable operation window
- Low inrush current
- Standby power<0.5W</li>
- 0.1% Dimming
- Solo mode
- 4 types of dimming curve(gamma(default),logarithmic,linear,square)
- 20W max
- · Flicker free for whole operation range

#### Benefits

- · Application-oriented operating window for maximum compatibility
- Excellent dynamic response performance
- Exceptionally smooth fades

#### Applications

· Architecture, Art and Museum, Entertainment, Hospitality, Healthcare, Urban landscape

Date of release:2024-09-04, Version A1

1/6

© MOONS'. All rights reserved. All content contained herein is subject to change without prior notice. More product documentation and MOONS' terms and conditions are available at https://www.moonsindustries.com

#### **MOONS'** moving in better ways

#### Certification

- Comply with UL Class2.
- Comply with Energy Star 2.2
- Certificated :





#### Electrical Specifications

	Efficiency (230Vac)	84% (Typical)					
	Voltage Range (Vac)	90~305					
	Rated Input Voltage (Vac)	100~277					
	Frequency Range (Hz)	50/60					
	Power Factor	>0.9 at 100~277Vac 50/60Hz input, with 50%~100% load conditions					
Input	THD	<20% at 100~277Vac 50/60Hz input, with 50%~100% load conditions					
	AC Current (Typical)	0.28A MAX. @100Vac, 0.12A MAX. @230Vac					
	Inrush Current (Typical)	${<}10A$ at 100~277Vac input 25 $^\circ\!\!\mathbb{C}$ cold start at 100% condition					
	Input Power (W)	28(MAX.)					
	Standby Power (W)	<0.5W @100Vac/50HZ, 230Vac/50HZ, 277Vac/60HZ					
	Leakage Current (MAX.)	0.5mA MAX. @277Vac					
Output	Output Voltage Range (VDC)	8~54					
	Output Current Range (mA)	150~1050					
	Rated Power (W)	20(MAX.)					
	Output Channel Number	1CH					
	Ripple Current (PK-PK)/AV	<10% at max. lout (ripple=(pk-avg)/avg) Low frequency (<120 Hz) content <1%					
	Current Tolerance	± 5% at output current range					
	Line Regulation	± 1%					
	Load Regulation	± 3%					
	Startup Time	<500ms @ 100Vac/230Vac/277Vac					
Dimming Port	DMX Dimming	Support DMX/RDM					
Dimming Port	Divix Dimining	Isolated DMX dimming 0.1~100%. Optional dimming curve: gamma(default),logarithmic,linear,square					
Protection	Over temperature protection	tc 100°C +/-10%, the driver stop working					
Protection	Short Circuit	Output current of power supply equals set current					
	Operating Temperature	-40~+40°C					
	Operating Humidity	20~95%RH, non-condensing					
Environment	Storage Temperature	-40~+85°C					
	Storage Humidity	10~95%RH					
	Vibration	10~500Hz, 5G 12min/cycle, period for 72min each along X $_{\rm X}$ Y $_{\rm X}$ Z axis					
	Ingress Protection Rating	IP20					
Safety&EMC	Safety Standard	UL8750,UL1310 Class 2, CAN/CSA-C22.2 No.223-M91,EN61347-1, EN61347-2-13					
	EMC Emission	FCC Part 15 ClassB, EN61000-3-2 , EN61000-3-3					
	EMC Immunity	EN61000-4-3,4,6,8,11, ANSI C62.41.2(4KV),EN61000-4-5(2.5KV),EN61000-4-2(air discharge 8KV)					
Others	Lifetime	>50000 hours @Tc =82 at 100% load conditions					
	MTBF	500,000 hours, measured at full load, 25°C ambient temperature SR-332 Issue 3					
	Dimension (L x W x H mm)	109*41*27					

100NS' oving in better ways				PU020	0S105A0 Data
Dimming Performance Flicker Free i. Meet :CEC title 24 JA8 & JA10, IEEE PAR 1789-2015	Flicker Percent Frequency	Spectrograms (0-1000)	DHz)		
	100.0%	10	f(ня) 100	1000	10000
			9		C Load 1 C Load 2
					▲ 10mA ▲ 5mA
Dimming Method	10.0%				▲ 2.5mA
In the range of 250~1050mA, the current operates in continuous mode;	Percent				© 10mA
In the range of 0~250mA, the current operates in PWM dimming mode, and	Field				@ 2.5mA
the PWM frequency 7.2KHZ.	1.0%	/	1 .		

#### Porgrammable Performance

#### Touch Setting

Program driver's parameters without cable.


t cable. Download Software

ImA Current Programmable Step
Default Factory Setting

#### Inrush Current

Ipeak & Time

Input Voltage	Inrush Current Ipeak	Inrush Current Time, measured 50% of Ipeak	
100 Vac	1.7A	30us	
220 Vac	3.8A	35us	Ipeak
277 Vac	4.8A	35us	





#### Automaitc Circuit Breakers

АСВ Туре	B10	B13	B16	B20	C10	C13	C16	C20
Number of LED Drivers @100Vac	16	20	25	31	26	33	41	51
Number of LED Drivers @220Vac	35	46	56	70	57	74	91	114
Number of LED Drivers @277Vac	43	56	69	86	70	91	112	140

## moving in better ways

#### Curve

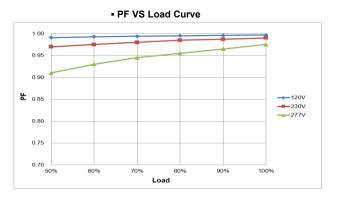

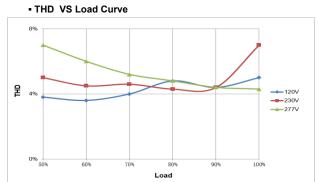






#### MOONS' moving in better ways


#### PU020S105AQI890 Datasheet

Curve

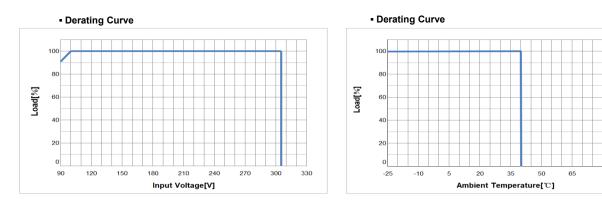

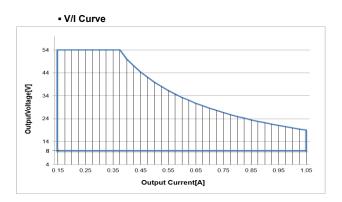

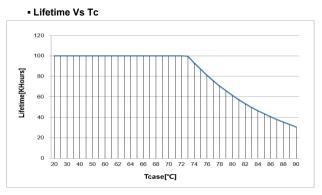


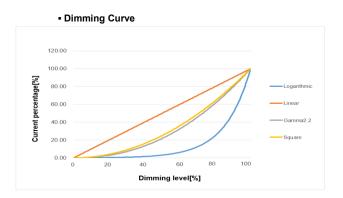

#### MOONS' ing in better ways

#### Mechanical Specification


Dimensions (Unit: mm)

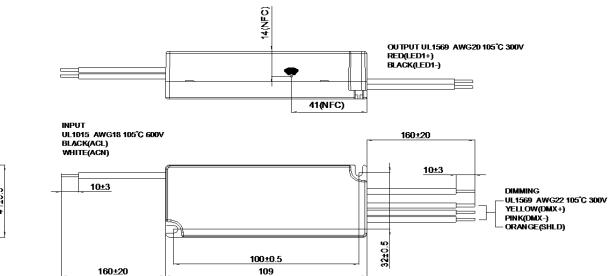





Connection diagram

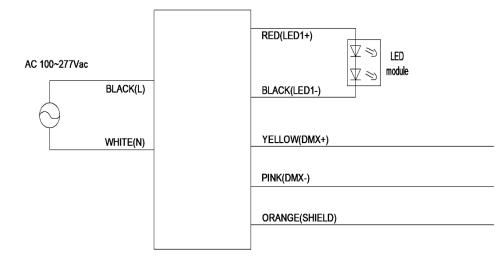

RoHS Compliance:

Our products comply with the European Directive 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.